

## End-Fed $\frac{1}{2}$ $\lambda$ Dipole Antenna with Universal FME-Connection System for Portable Equipment in the 70 cm Band

### DESCRIPTION

- A highly professional antenna in stainless steel material.
- Full-size, end-fed  $\frac{1}{2}$   $\lambda$  antenna whip.
- High gain and efficient decoupling from the portable equipment.
- 3 dB gain (typ.) compared to a  $\frac{1}{4}$   $\lambda$  antenna whip on the same equipment.
- Highest quality materials in an elegant design.
- Delivered factory-tuned and tested to ensure minimum VSWR and optimum performance.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procom's line of black FME-connectors (to be ordered separately): BFME-UHF, BFME-BNC, BFME-TNC, BFME-N, BFME-EBNC and BFME-ETNC.




### SPECIFICATIONS

Electrical	
Model	EFSS 70/...-FME
Frequency	70 cm band (380 - 470 MHz)
Antenna Type	Antenna for portable equipment
Max. Input Power	25 W
Polarisation	Vertical
Impedance	50 $\Omega$
Gain	0 dBd / 2.15 dBi (3 dB compared to a $\frac{1}{4}$ $\lambda$ portable antenna)
VSWR	< 1.5:1 @ f. res.
Bandwidth	$\geq$ 30 MHz @ VSWR $\leq$ 2.0
Mechanical	
Connection(s)	FME(f) (Exchangeable BFME-connectors to be ordered separately)
Materials	Stainless steel Black-chromed brass
Colour	Black
Height	Approx. 340 mm / 13.39 in.
Weight	Approx. 0.05 kg / 0.11 lb.


### ORDERING

Model	Product No.	Frequency
EFSS 70/339-FME(f)	140000730	324 - 354 MHz
EFSS 70/377-FME(f)	140000731	362 - 392 MHz
EFSS 70/387.5-FME(f)	140000732	372.5 - 402.5 MHz
EFSS 70/395-FME(f)	140000733	380 - 410 MHz
EFSS 70/400-FME(f)	140000734	385 - 415 MHz
EFSS 70/402-FME(f)	140000735	387 - 417 MHz
EFSS 70/410-FME(f)	140000736	395 - 425 MHz
EFSS 70/411-FME(f)	140000737	396 - 426 MHz
EFSS 70/414-FME(f)	140000738	399 - 429 MHz
EFSS 70/416-FME(f)	140000739	401 - 431 MHz
EFSS 70/420-FME(f)	140000740	405 - 435 MHz
EFSS 70/426.5-FME(f)	140000741	411.5 - 441.5 MHz
EFSS 70/430-FME(f)	140000742	415 - 445 MHz
EFSS 70/433-FME(f)	140000743	418 - 448 MHz
EFSS 70/434-FME(f)	140000744	419 - 449 MHz
EFSS 70/440-FME(f)	140000745	425 - 455 MHz
EFSS 70/447-FME(f)	140000746	432 - 462 MHz
EFSS 70/450-FME(f)	140000747	435 - 465 MHz
EFSS 70/458-FME(f)	140000748	443 - 473 MHz
EFSS 70/459-FME(f)	140000749	444 - 474 MHz
EFSS 70/460-FME(f)	140000750	445 - 475 MHz

TYPICAL VSWR CURVE

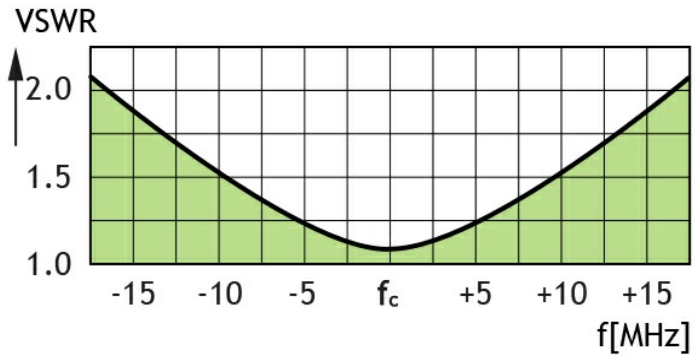

RECOMMENDED BFME-CONNECTORS

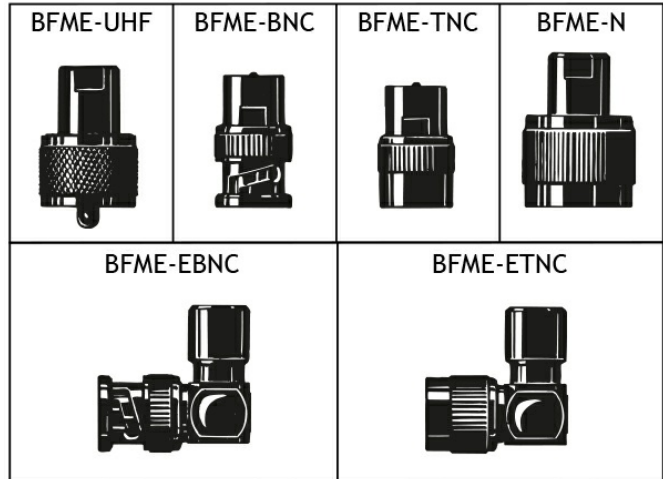

(To be ordered separately)

