


Dual band whip with Shock Spring for the 150 MHz and 450 MHz bands

BESCHREIBUNG

- External antenna whip mounted on the ProFin mount.
- When BESTELLUNG the antenna, please state the centre frequency on each band.
- Sturdy, general-purpose dual-band ¼ λ antenna in professional quality.
- Easily removable for car wash.

CONNECTION DIAGRAM

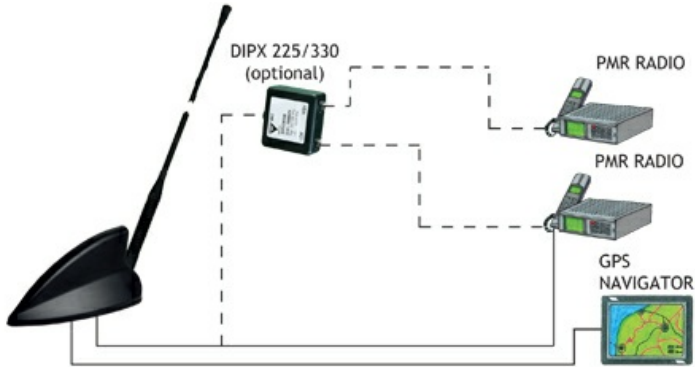

SPEZIFIKATIONEN

| Elektrisch DE | |
|-----------------------|---|
| Modell | MP-G-S/150/450/FQ |
| Antennentyp | Dual-band ¼ λ mobile antenna |
| Max. Eingangsleistung | 25 W |
| Polarisation | Vertikal |
| Impedanz | 50 Ω |
| Bandbreite | 150 MHz: 8 MHz @ VSWR ≤ 2.0 450 MHz: 15 MHz @ VSWR ≤ 2.0 |
| Gewinn (EIA RS-329-1) | 150 MHz: Approx 0 dB 450 MHz: Approx 0 dB |

| Mechanisch DE | |
|---------------|--|
| Materialien | Whip : Polyethylene covered copper thread / glass fibre Black-chromed brass Spring : Black-chromed stainless steel |
| Farbe | Schwarz |
| Höhe | ca. 350 mm |
| Gewicht | ca. 0.05 kg |
| Montage | On the ProFin G1 mount and ProFin G2 mount |

BESTELLUNG

| Modell | Produkt Nr |
|------------------------------------|------------|
| MP-G-S/150/450/FQ/FQ whip | 132000224 |
| Accessories | |
| DIPX 225/330-FME (optional) * | 200000670 |
| FME(f)-SMA(f) adaptor (optional) * | 662000037 |

ORDERING NOTE

When BESTELLUNG the antenna, please state the centre frequency on each band.
* Both to be ordered separately.

MOUNTING DETAILS

