


Dual band whip with Shock Spring for the 150 MHz and 450 MHz bands

BESCHREIBUNG

- > External antenna whip mounted on the ProFin mount.
- > When BESTELLUNG the antenna, please state the centre frequency on each band.
- > Sturdy, general-purpose dual-band ¼ λ antenna in professional quality.
- > Easily removable for car wash.

CONNECTION DIAGRAM

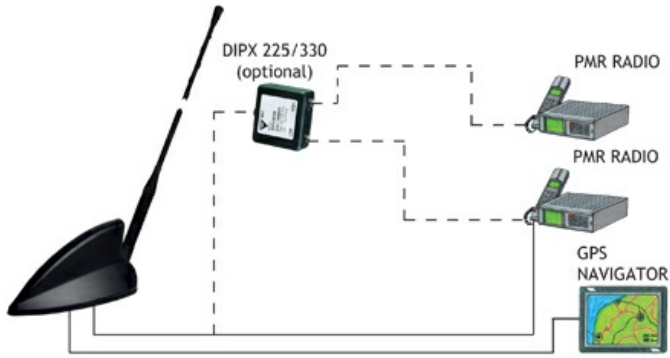

SPEZIFIKATIONEN

Elektrisch DE	
Modell	MP-G-S/150/450/FQ
Antennentyp	Dual-band ½ λ mobile antenna
Max. Eingangsleistung	25 W
Polarisation	Vertikal
Impedanz	50 Ω
Bandbreite	150 MHz: 8 MHz @ VSWR ≤ 2.0 450 MHz: 15 MHz @ VSWR ≤ 2.0
Gewinn (EIA RS-329-1)	150 MHz: Approx 0 dB 450 MHz: Approx 0 dB

Mechanisch DE	
Materialien	Whip: Polyethylene covered copper thread / glass fibre Black-chromed brass Spring: Black-chromed stainless steel
Farbe	Schwarz
Höhe	Approx. 350 mm / 13.78 in.
Gewicht	Approx. 0.05 kg / 0.11 lb.
Montage	On the ProFin G1 mount and ProFin G2 mount

BESTELLUNG

Modell	Produkt Nr
MP-G-S/150/450/FQ/FQ whip	132000224
Accessories	
DIPX 225/330-FME (optional) *	200000670
FME(f)-SMA(f) adaptor (optional) *	662000037

ORDERING NOTE

When BESTELLUNG the antenna, please state the centre frequency on each band.
* Both to be ordered separately.

MOUNTING DETAILS

