

## Centre fed folded dipole 117 - 137 MHz

### DESCRIPTION

- A VHF Center Fed Dipole antenna for PMR/Trunked Radio, Broadcast and VHF Aircraft Band applications.
- Multiple dipoles can be mounted on a tower and connected with a phasing harness to form a high gain, stacked array.
- Produced to the highest quality standards, these robust antenna designs will ensure reliable operation in harsh environmental conditions.
- Former Skymasts brand product.




### SPECIFICATIONS

Electrical	
Model	S.1-127
Frequency	117 - 137 MHz
Max. Input Power	150 W
Polarisation	Linear (Vertical or Horizontal)
3 dB Beamwidth, E-Plane	80 °
3 dB Beamwidth, H-Plane	Omni - will depend on mounting distance from mast.
Impedance	50 Ω
Gain	0 dBd (omni - will depend on mounting distance from mast)
VSWR	< 1.5:1
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)
Mechanical	
Connection(s)	N(f) on 3m RG213/U cable
Materials	Boom, 32 mm dia. aluminium elements, 19.1 mm dia. aluminium balun, fully moulded enclosure
Dimensions	1330 x 1050 x 100 mm (L x H x D)
Wind Load	123 N (160 km/h)
Weight	Approx. 3 kg / 6.61 lb.
Mounting Bracket	3202078/68 + 3201079/00 (Ordered Separately)
Balun Encapsulant	Polyurethane Resin U-600
Alternate Mounting Bracket	0900912/00, 0302032/68, or 0300064/00 + U-Bolts to match mounting pipe diameter (Ordered Separately)
Environmental	
Ingress Protection	IP68

### ORDERING


Model	Product No.	Frequency
Centre fed folded dipole	S.1-127	117 - 137 MHz
Accessories		
Galvanised steel crossover bracket 32/50 mm	0900912/00	
Pressed steel cross clamp 2" x 1-1/4" (JBL73)	0302032/68	
Cast aluminium cross clamp, circular	0300064/00	
M8 x 50 mm (2") U-Bolts (1 Pair)	4884036/00	
M8 x 75 mm (3") U-Bolts (1 Pair)	4884076/00	
Fixed norstel / coupler clamp (cross clamp)	3202078/68	
Increasing sleeve	3201079/00	

RADIATION PATTERNS

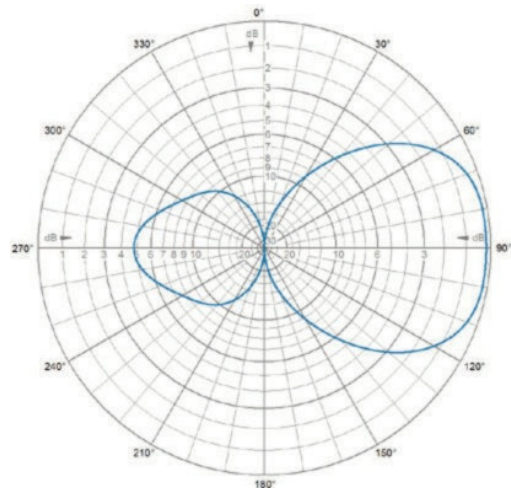

E-Plane | 127 MHz

RADIATION PATTERNS

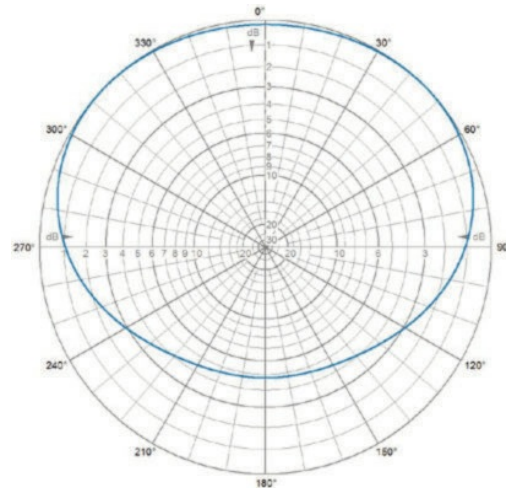

H-Plane | 127 MHz

