

Unity Gain $\frac{1}{4}$ λ Mobile Antenna whip for the 450 MHz Band

BESCHREIBUNG

- External antenna whip mounted on the ProFin mount.
- Flexible antenna made of steel wire covered with black silicone tubing.
- Easily removable for car wash.
- Modells within 380 - 470 MHz.



SPEZIFIKATIONEN

Elektrisch DE	
Modell	MP-B/450/...whips
Frequenz	MP-B/450/405 MHz whip : 380 - 430 MHz MP-B/450/445 MHz whip : 420 - 470 MHz
Antennentyp	Mobile antenna
Max. Eingangsleistung	25 W
Polarisation	Vertikal
Impedanz	50 Ω
Bandbreite	≥ 50 MHz @ VSWR ≤ 2.0
Gewinn (EIA RS-329-1)	0 dB

Mechanisch DE	
Materialien	Silicone tube over flexible bowden wire Chromed brass
Farbe	Schwarz
Höhe	ca. 140 mm
Gewicht	ca. 0.025 kg
Montage	On the ProFin G1 mount and ProFin G2 mount


BESTELLUNG

Modell	Produkt Nr	Frequenz
MP-B/450/405 MHz whip	132000247	380 - 430 MHz
MP-B/450/445 MHz whip	132000248	420 - 470 MHz

MOUNTING DETAILS



TYPICAL VSWR CURVE MP-B/450/405

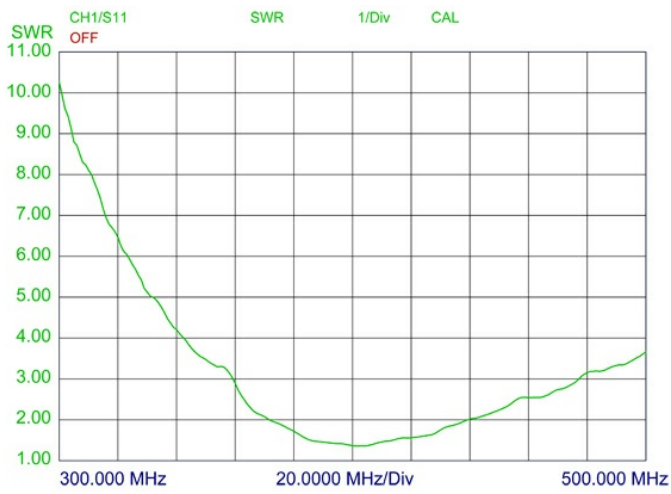

TYPICAL VSWR CURVE MP-B/450/445

